
Filters & Pumps





| AA | Technical info | | Code | |
|----|----------------|--|------|--|
|----|----------------|--|------|--|




PİNA "NORM 120 SERIES" SAND FILTERS (WITH PLATFORM)

Pina filters are produced from fiberglass reinforced polyester. Manhole cover and sight glass is available on side. Norm serie can be used with single or multi layered bed. Including manometer and air-relief valve on top. All steel parts are AISI 304.

According to the request, polyvinylester can be coated inside to resist ozonated water. Ask for special requests.

Sand bed is 120cm / Manhole is 40cm.

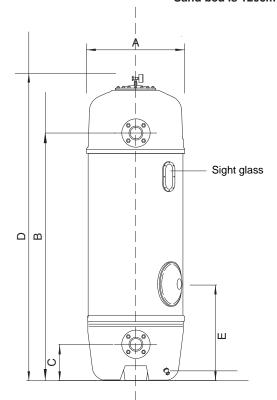

Default Lateral





| Nozzle platform | | | | |
|-----------------|--|--|--|--|
| # 1 3 5 | | | | |
| 39.000 | | | | |

| Diameter: 800mm Max. height: 212mm Sand bed: 120cm Inlet/ Outlet: Ø75-75 Sight Glass: 40cm Max working temp: 40°C | AAA78 | |
|--|-------|--|
| Max working pressure: 4 bars Max test pressure: 6 bars Diameter: 1250mm | AAA72 | |
| Max. height: 232mm Sand bed: 120cm Inlet/ Outlet: Ø110-110 Sight Glass: 40cm Max working temp: 40°C Max working pressure: 4 bars Max test pressure: 6 bars | | |
| Diameter: 1400mm Max. height: 247mm Sand bed: 120cm Inlet/ Outlet: Ø125-125 Sight Glass: 40cm Max working temp: 40°C Max working pressure: 4 bars Max test pressure: 6 bars | AAB78 | |
| | | |

| | | ' | | | | | |
|--------|--------|--------|--------|--------|--------------------|---------------------|---------------------|
| Α | B (mm) | C (mm) | D (mm) | E (mm) | İnce Kum (Sand) | Kalın Kum (Sand) | Bağlantı (Diam.) |
| Ø 650 | 161 | 35 | 200 | 67 | 450 | 50 | Ø 63-63 |
| Ø 800 | 167 | 35 | 212 | 68 | 800 | 75 | Øi75-75 |
| Ø 950 | 164 | 41 | 226 | 77 | 1200 | 200 | Ø 90-90 |
| Ø 1250 | 193 | 37 | 246 | 101 | 1850 | 200 | Ø110-110 |